

HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C




Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

3143-XX R XX B K00 X 1

No. of Pins	Contact Plating	Color	Packing
10	G0=Gold Flash	B=Black	A=Tray
14	G3=10u"Gold	W=White	T=Tube
16	G4=15u"Gold		
20	G5=30u"Gold		
24	S0=Gold Flash/Tin		
26	S3=10u"Gold/Tin		
30	S4=15u"Gold/Tin		
40	S5=30u"Gold/Tin		
100	SN=Tin		

Item	Pitch	Mating
Standard	1.27X2.54	52#42
Alternate		

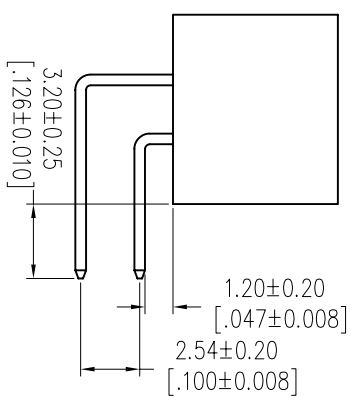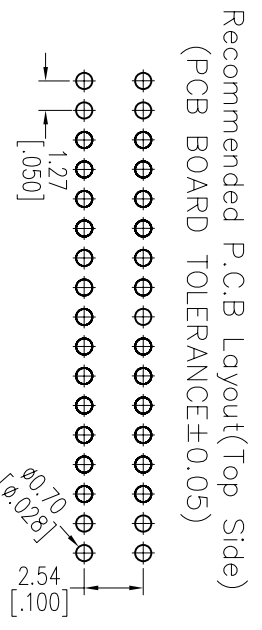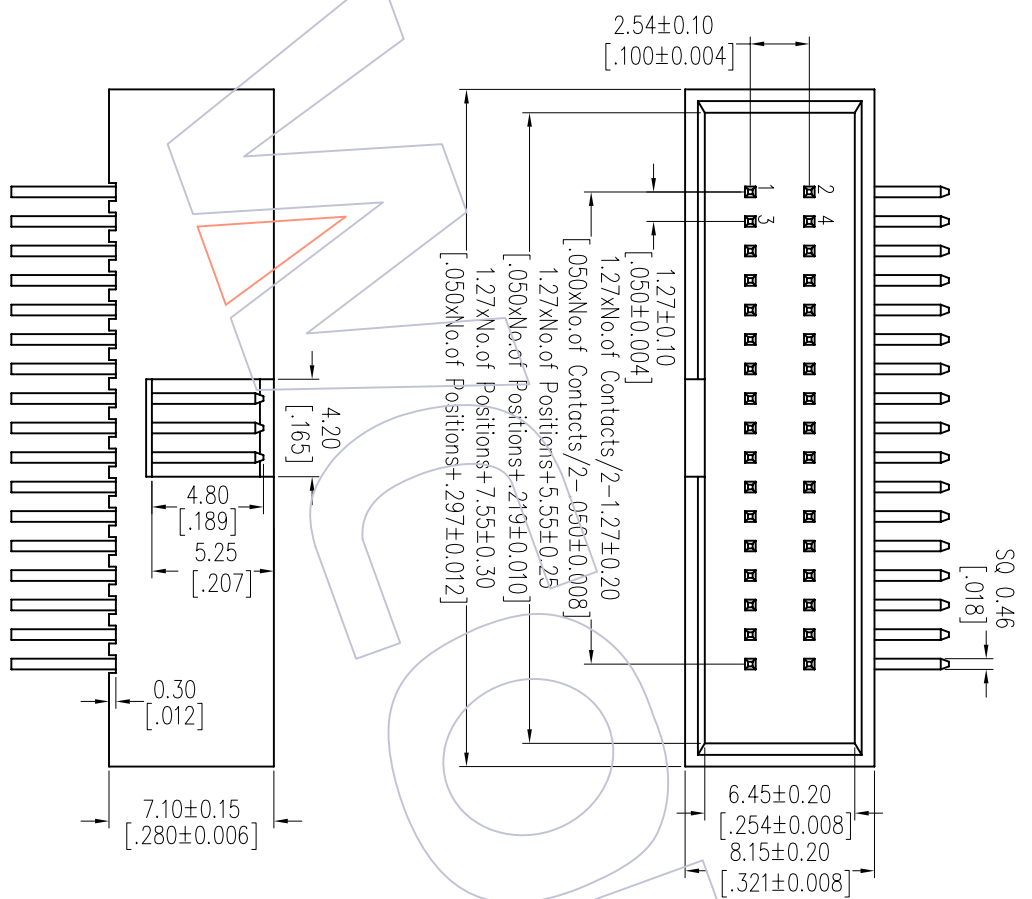

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A0	2012/09/18	NEW	---	XX	JYhuang	2012/09/18	mm	A4	3143-XXRXXBK00X1	1.27*2.54 BOX HEADER 90° H=7.10		Tel: +86 769 85358920	Tel: +86 512 57468408
				X.XXX	CHECK	DATE	SIZE	SHEET				Fax: +86 769 85358915	Fax: +86 512 57468468
				Angle	± 3°	APPROVE	PROJ.					E-mail: sales@wcon.com	E-mail: sales@wcon.com
				DIM	TOL	DATE							

WCON

Http: www.wcon.com