

# HSF

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

**NOTES:**


- Current Rating: 1.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%G.F UL94V-0

## Ordering Information

3240-XX R XX BS X1

No. of Pins	Contact Plating	Color Insulator	Packing
10 34	G0=Gold Flash	B=Black	T=Tube
12 40	G3=10u"Gold	U=Blue	
14 44	G4=15u"Gold	W=White	
16 50	G5=30u"Gold		
20 60	S0=Gold Flash/Tin		
24 64	S3=10u"Gold/Tin		
26 80	S4=15u"Gold/Tin		
30 100	S5=30u"Gold/Tin		
32	SN=Tin		

Item	Pitch	Mating
Standard	1.27X2.54	5242
Alternate		

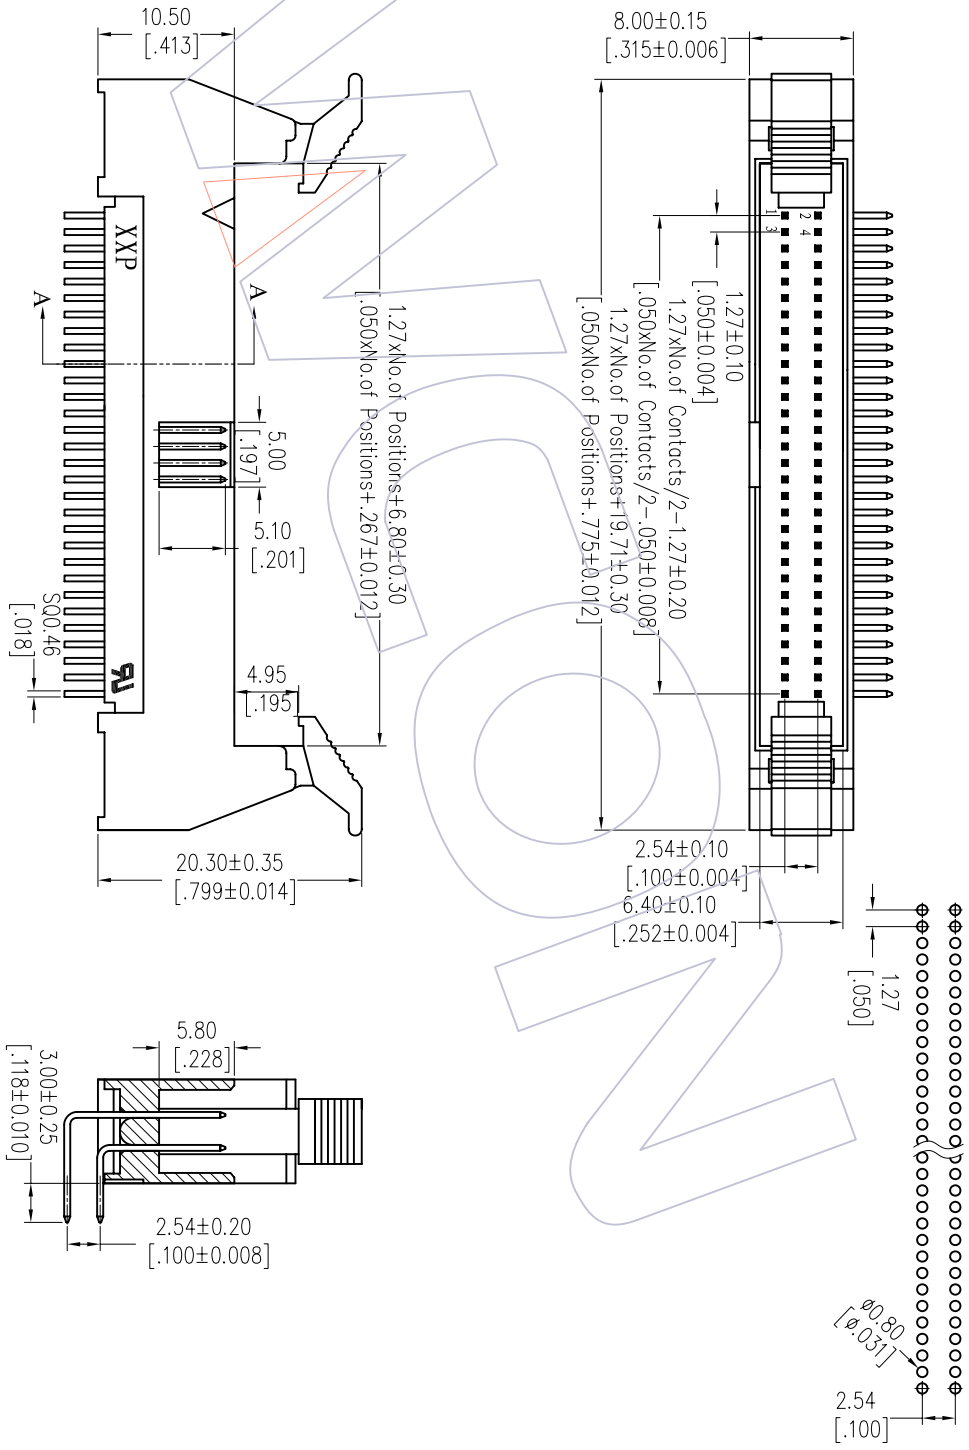

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A0	2012/10/05	NEW		XX	JYHuang	2012/10/05	±0.40	mm	3240-XXRXXBSX1	1.27*2.54 EJECTOR HEADER 90° DIP		Http: www.wcon.com	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIW	CHECK	DATE	± 3'	SHEET				Tel: +86 769 85358920	Tel: +86 512 57468408
				TOL	APPROVE	DATE		1/1				Fax: +86 769 85358915	Fax: +86 512 57468468
												E-mail: sales@wcon.com	E-mail: sales@wcon.com

# WCON

WCON-Dongguan  
Tel: +86 769 85358920  
Fax: +86 769 85358915  
E-mail: sales@wcon.com

WCON-Kunshan  
Tel: +86 512 57468408  
Fax: +86 512 57468468  
E-mail: sales@wcon.com