

HSF

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0
 Shell: Steel, Sn Or Ni Plated
 Nut: Brass, Sn over Ni Plated



Ordering Information

6220-XX F X XX X 01


No. of Pins	Type	Contact Plating	Insulator Color
9P	B=With Back Nut	S0=Gold Flash/Tin	B:Black
15P	F=With Front Nut	S3=10u"Gold/Tin	U:Blue
25P	N=Without Nut	S4=15u"Gold/Tin	W:White
37P	D=With Front Screw&Back Nut	S5=30u"Gold/Tin	SN=Tin




PINS	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM "E"
09	30.81	24.99	16.33	19.28	15.60
15	39.14	33.32	24.66	27.65	24.60
25	53.04	47.04	38.38	41.30	37.70
37	69.32	63.50	54.84	57.44	54.50

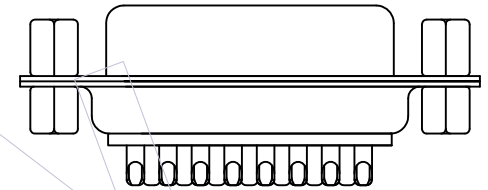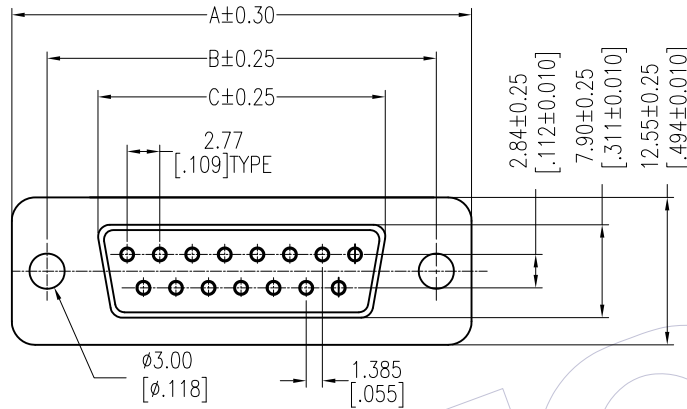


6220-XXFDXXX01

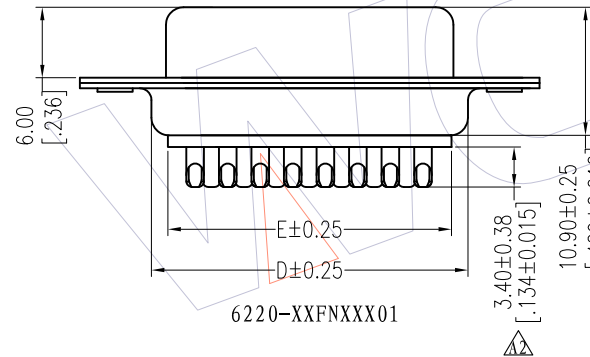


6220-XXFNXXX01



6220-XXFBXXX01

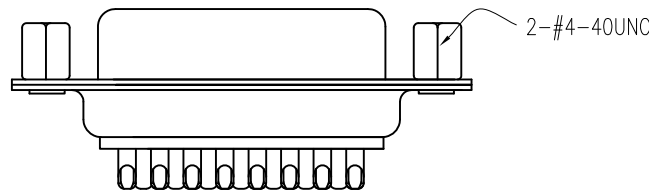

6220-XXFFXXX01

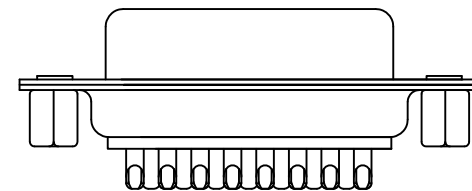

6220-XXFBXXX01

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A4	2015/04/14	Add the Type	△	OPERATION	Allen	2015/04/14	UNIT	mm	6220-XXFXXX01
A3	2014/06/18	Modify The DIM 25.25 to 24.66	△	x.X ±0.40	CHECK	DATE	SIZE	A4	TITLE: D-SUB FEMALE DUAL ROW SOLDER TYPE
A2	2014/06/06	Modify	△	x.XX ±0.25	APPROVE	DATE	SHEET	1/1	Customer NO.
A0	2012/12/03	NEW	-----	x.XXX ±0.15			PROJ.		
				Angle ± 3'					
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--