

HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C




Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

3122-XX R XX BK00 X 1

No. of Pins Contact Plating Color Insulator Packing
 10 30 G0=Gold Flash B=Black T=Tube
 14 34 G3=10u"Gold W=White
 16 40 G4=15u"Gold G3=30u"Gold
 20 44 S0=Gold Flash/Tin
 24 50 S3=10u"Gold/Tin
 26 60 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

Item	Pitch	Mating
Standard	2.00	5224
Alternate		

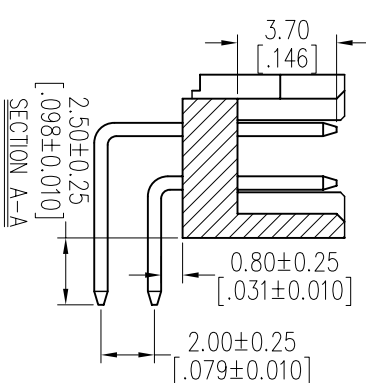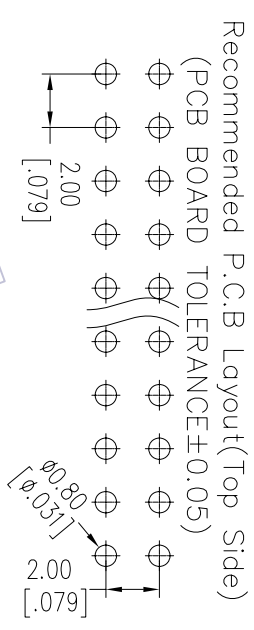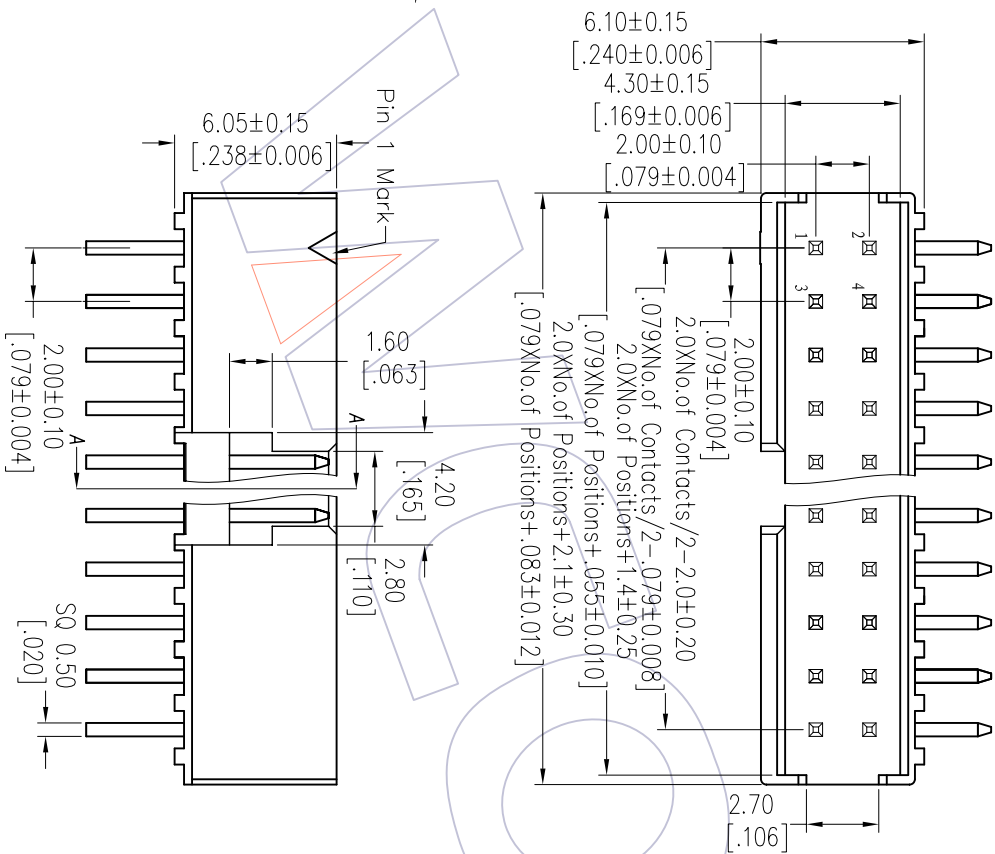

OPERATION		DRAW		DATE		SCALE		PART NO.		WCON Http: www.wcon.com WCON-Dongguan WCON-Kunshan Tel: +86 769 85358920 Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: sales@wcon.com	
XX	±0.40	JYhuang	CHECK	2012/09/24	mm	3122-XXRXXBK00X1					
X.XXX		CHECK		DATE	A4	TITLE:		2.00 BOX HEADER 180°			
X.XXX		± 3'		DATE	1/1	H=6.10 "P" TYPE		Customer NO.			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIW	TOL	APPROVE	DATE	PROJ.		
A0	2012/09/24	NEW									