

HSF

NOTES:


Rated Current:18.0 AMP
 Contact Resistance:8.0 milliohm Max
 Withstand Voltage:2000 V AC/DC
 Insulation Resistance:1000 Megohm min
 Operation Temperature:-40°C to +105°C

Housing Material:PA66+30%GF(UL94V-0)
 Contact Material:Brass
 Terminal Plating:
 Matte Tin Plated Over Nickel




Ordering Information:

P M 750- 1 S XX A SM 1

M=Male Pitch No.of Pins Color Contact Plated Series No.
 750=7.50 02-20P A=Green SM=Male Tin

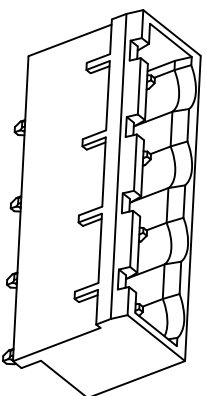

3D VIEW(REF.)
 SCALE 1:2

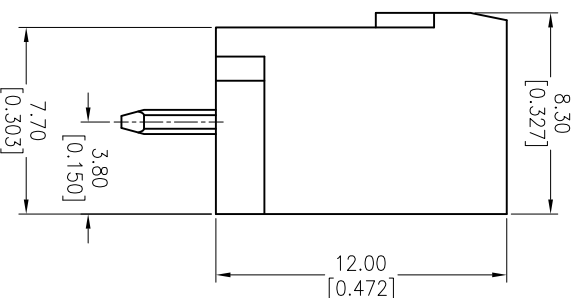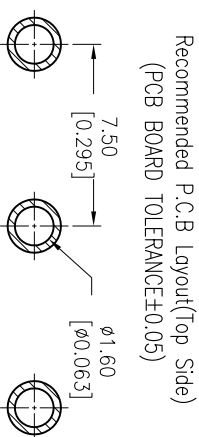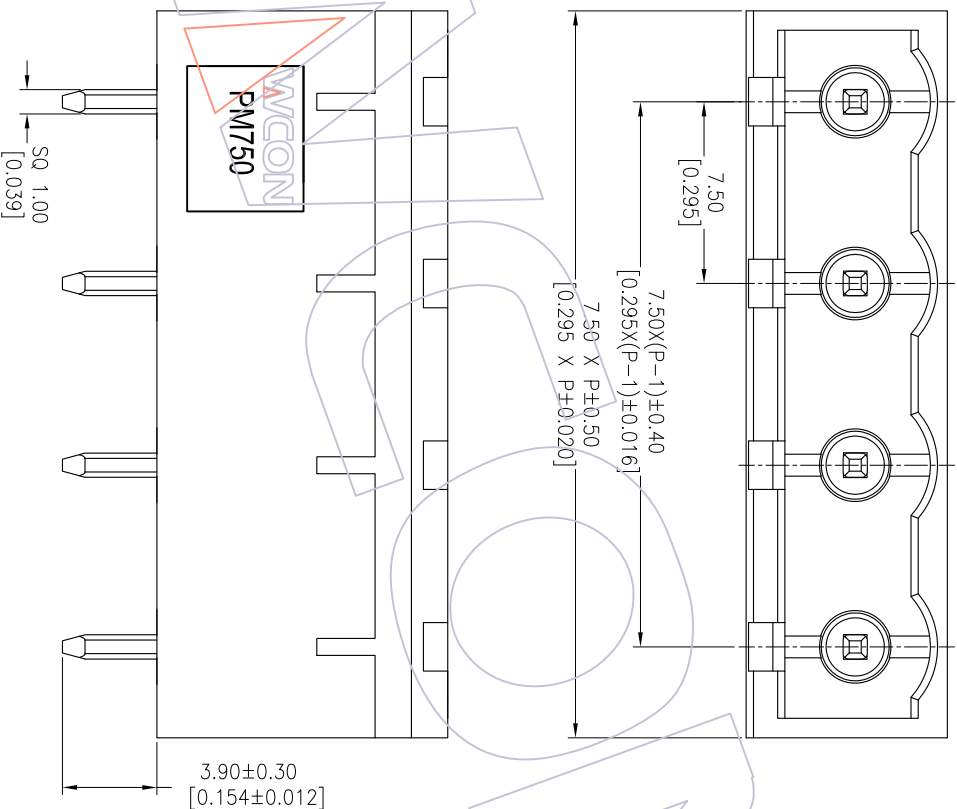

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2013/11/06	NEW	

OPERATION	DRAW	DATE	SCALE	FIT
XX	Tsingn	2013/11/06	mm	inch
XX	CHECK	DATE	UNIT	SIZE
XXX			A4	1/1
Angle	APPROVE	DATE	SHEET	PROJ.
± 3'			1/1	
DIM	TOL			

PART NO.	PM750-1SXXASMI
TITLE:	7.50mm Pitch Male Pluggable Terminal Blocks
CUSTOMER NO.	

WCON

WCON-Dongguan
 Http: www.wcon.com
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Http: www.wcon.com
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com