

# HSF

**NOTES:**





- Current Rating: 2.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%G.F UL94V-0

## Ordering Information

3122-XX S XX B K00 X 2

- No. of Pins 8P-44P
- Contact Plating G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- Color Insulator B=Black, T=Tube
- Packing T=Tube

Item	Pitch	Mating	Dip(A)
Standard	2.00	5224	2.80
Alternate			

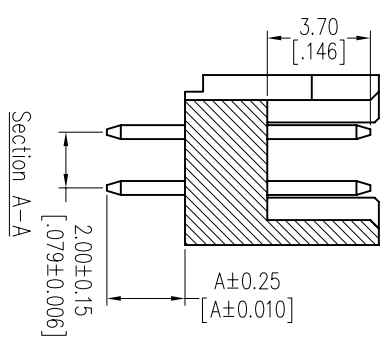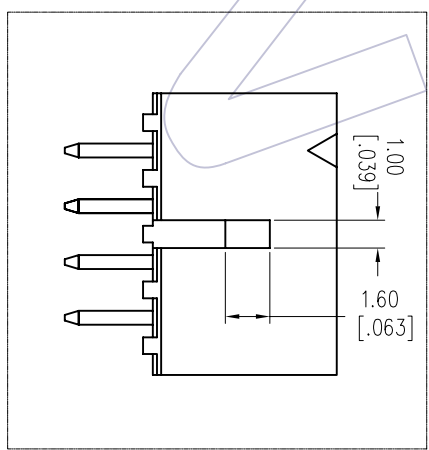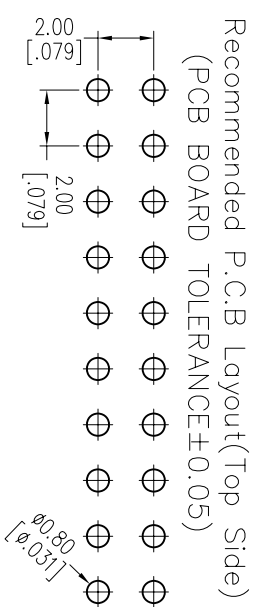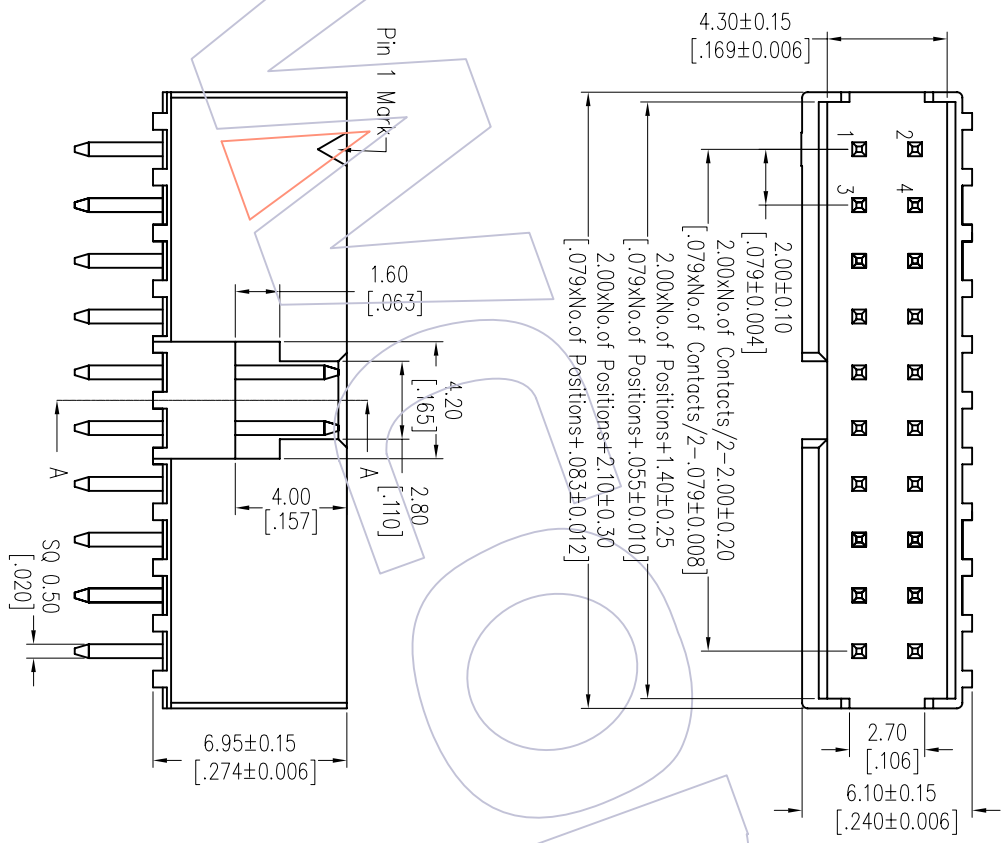

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
XX	±0.40	JYHuog		2012/09/24		mm				3122-XXSXXBK00X2	
CHECK		CHECK		DATE		SIZE		SHEET		TITLE:	
X.XXX	±0.15	X.XXX	±0.15			A4	1/1	1/1		2.00 BOX HEADER 180°	
ANGLE		APPROVE		DATE		SHEET		PROJ.		Customer NO.	
X.XXX	± 3°										
CHANGE		APPROVE		DATE		SHEET		PROJ.		Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION		DATE		SHEET		PROJ.		Customer NO.	
A0	2012/09/24	NEW				1/1					

# WCON

Http: www.wcon.com  
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com  
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com